

## AERO RECESS SLIM

Product Images

### APPLICATION AREAS:

Office  
buildings, Retail, Supermarkets, Hospitality, libraries



CCT Tuning



Linkable



Driver Inbuilt



RF Control



Tailor Made

## TECHNICAL SPECIFICATIONS

### PRODUCT REFERENCE

ITEM CODE	AERO RECESS SLIM 30
ENVIRONMENT	Indoor
INSTALLATION	Recessed

### CONSTRUCTION AND MATERIALS

SIZE OUT SIDE MM	1203x90x65
CUT OUT SIZE (MM)	1187x75x65
HOUSING	Extruded Aluminium
LENS / DIFFUSER	High Transmission PMMA
REFLECTOR	N/A
SURFACE FINISH	White/Black/Custom Powder Coated
IP rating	30

### THERMAL MANAGEMENT

HEAT SINK MATERIAL	Aluminium
COOLING TECHNIQUE	Passive

### OPTICAL SYSTEM

BEAM ANGLE	110°
ILLUMINATION MODE	Direct Lighting
SWIVEL	No

## LIGHT TECHNOLOGY

<b>LED FITTED</b>	Bridgelux
<b>DELIVERED LUMENS</b>	3450 / 3300 / 3150
<b>CCT (K)</b>	6000 / 4000 / 3000
<b>Tunable</b>	On Request
<b>LED BINNING</b>	3 Step MacAdam
<b>CRI (Ra)</b>	80 / 90
<b>LED LIFE L70</b>	45,000 HRS
<b>LUMINAIRE</b>	4200 / 4050 / 3900
<b>LUMINOUS FLUX</b>	
<b>only fore internal use</b>	140
<b>LUMINOUS EFFICACY</b>	115 Lumens / Watt

## ELECTRICAL SYSTEM

<b>(UGR)</b>	<22
<b>INPUT VOLTAGE</b>	220 TO 240 Vac
<b>INPUT POWER</b>	30W
<b>POWER FACTOR</b>	>0.95
<b>THD</b>	<10%
<b>CONTROL GEAR</b>	IN BUILT
<b>MOUNTING</b>	
<b>DRIVER PROTECTION</b>	OVP, Short Circuit, Surge
<b>DIMMING</b>	Phase / Analog / Dali / RF / APP
<b>EMERGENCY BATTERY BACKUP</b>	On Request


## PACKAGING DETAILS

**PACKING QTY** 2

**GROSS WEIGHT -**

**CARTOON SIZE** 48.75"x9"x5"  
(LXBXH)

### DIMENSIONS

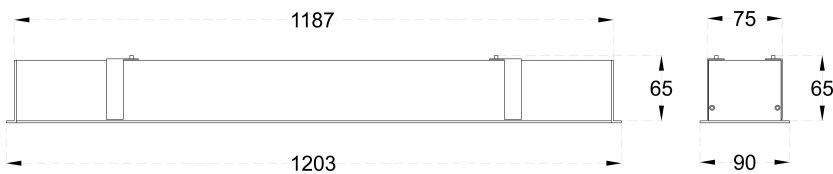

### PHOTOMETRIC



## **ARCADE LIGHTING INDUSTRIES PVT LTD**

8 Raju industrial estate, Penkar pada, Near  
dahisar check naka, Mira road 401107

**NOTE :** The technical data sheet with design registration stamp is the property of Arcade Lighting India Pvt. Ltd. & protected under Intellectual Property law, and it is restricted for sharing with other lighting suppliers

Technical parameters are subjected to change time to time in order to improve product performance and reliability

BP-RV00 AR/FRT/TEC/TDS/01