LED PROFILES 1

Product Images

APPLICATION AREAS:

Office buildings,Retail,Supermarkets,Hospitality,Library



Tailor Made | 80 CRI | Smart Lighting | CCT Tuning | Dimming Optional

TECHNICAL SPECIFICATIONS

PRODUCT REFRENCE

ITEM CODE	AR0011708R
ENVIRONMENT	Indoor
INSTALLATION	Recessed

CONSTRUCTION AND MATERIALS

SIZE OUT SIDE MM	2000x23x8
CUT OUT SIZE (MM)	2000x17x8
HOUSING	HOUSING
LENS / DIFFUSER	High Transmission PMMA
REFLECTOR	N/A
SURFACE FINISH	Anodised/Custom Powder Coated
IP rating	20

THERMAL MANAGEMENT

HEAT SINK MATERIAL	Aluminium
COOLING TECHNIQUE	Passive

OPTICAL SYSTEM

BEAM ANGLE	110°
ILLUMINATION MODE	Indirect Lighting
SWIVEL	No

LIGHT TECHNOLOGY

LED FITTED	NA
DELIVERED LUMENS	NA
CCT (K)	NA
Tunable	NA
LED BINNING	NA
CRI (Ra)	NA
LED LIFE L70	NA
LUMINAIRE LUMINOUS FLUX	NA
LUMINOUS EFFICACY	

ELECTRICAL SYSTEM

(UGR)	NA
INPUT VOLTAGE	NA
INPUT POWER	NA
POWER FACTOR	NA
THD	NA
CONTROL GEAR	NA
MOUNTING	
DRIVER PROTECTION	NA
DIMMING	NA
EMERGENCY BATTERY BACKUP	NA


PACKAGING DETAILS

PACKING QTY -


GROSS WEIGHT -

CARTOON SIZE (LXBXH) -

DIMENSIONS

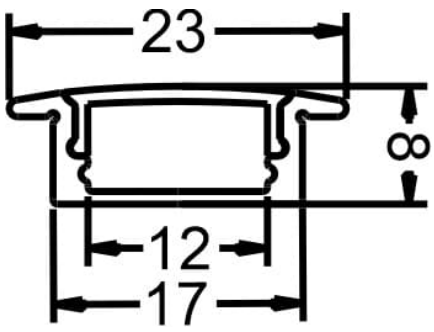

PHOTOMETRIC



ARCADE LIGHTING

8 Raju industrial estate, Penkar pada, Near
dahisar check naka, Mira road 401107

NOTE : The technical data sheet with design registration stamp is the property of Arcade Lighting & protected under Intellectual Property law, and it is restricted for sharing with other lighting suppliers