


LED PROFILE

Product Images

APPLICATION AREAS:

Office
buildings, Retail, Supermarkets, Hospitality, libraries

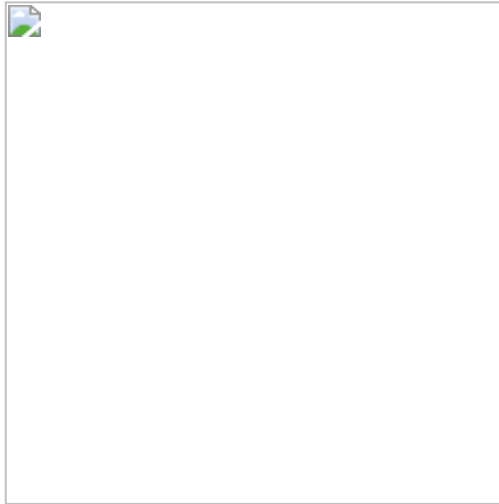

Tailor Made



Smart Lighting



CCT Tuning



Dimming
Optional

TECHNICAL SPECIFICATIONS

PRODUCT REFERENCE

ITEM CODE	AR0031715R
ENVIRONMENT	Indoor
INSTALLATION	Recessed

CONSTRUCTION AND MATERIALS

SIZE OUT SIDE MM	1000x23.2X15.3
CUT OUT SIZE (MM)	1000x17X15.3
HOUSING	Extruded Aluminium
LENS / DIFFUSER	High Transmission PMMA
REFLECTOR	N/A
SURFACE FINISH	Anodised/Custom Powder Coated
IP rating	20

THERMAL MANAGEMENT

HEAT SINK MATERIAL	Aluminium
COOLING TECHNIQUE	Passive

OPTICAL SYSTEM

BEAM ANGLE	110°
ILLUMINATION MODE	Direct Lighting
SWIVEL	No

LIGHT TECHNOLOGY

LED FITTED	-
DELIVERED LUMENS	-
CCT (K)	-
Tunable	-
LED BINNING	-
CRI (Ra)	-
LED LIFE L70	-
LUMINAIRE	-
LUMINOUS FLUX	-
only fore internal use	-
LUMINOUS EFFICACY	-

ELECTRICAL SYSTEM

(UGR)	-
INPUT VOLTAGE	-
INPUT POWER	-
POWER FACTOR	-
THD	-
CONTROL GEAR	-
MOUNTING	-
DRIVER PROTECTION	-
DIMMING	-
EMERGENCY BATTERY	-
BACKUP	-


PACKAGING DETAILS

PACKING QTY -


GROSS WEIGHT -

CARTON SIZE -
(LXBXH)

DIMENSIONS

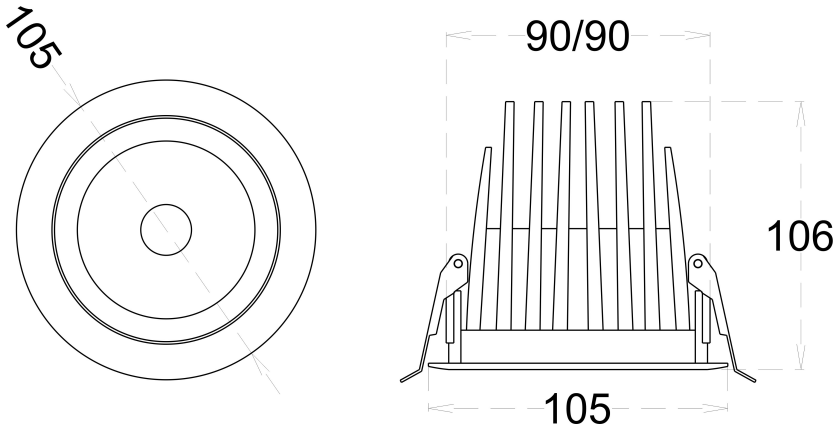

PHOTOMETRIC

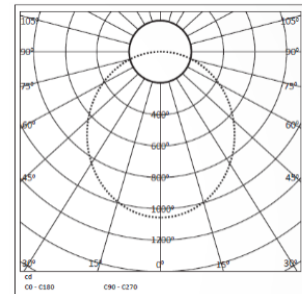

ARCADE LIGHTING INDUSTRIES PVT LTD

8 Raju industrial estate, Penkar pada, Near
dahisar check naka, Mira road 401107

NOTE : The technical data sheet with design registration stamp is the property of Arcade Lighting India Pvt. Ltd. & protected under Intellectual Property law, and it is restricted for sharing with other lighting suppliers

Technical parameters are subjected to change time to time in order to improve product performance and reliability

