

ARGON UP DOWN

Product Images

APPLICATION AREAS:

Office buildings, Retail, Supermarkets, Hospitality, liberar





TECHNICAL SPECIFICATIONS

ITEM CODE

ENVIRONMENT

INSTALLATION

CONSTRUCTION AND MATERIALS

SIZE OUT SIDE MM **CUT OUT SIZE (MM)** HOUSING LENS / DIFFUSER

SURFACE FINISH

599x94X80 **Extruded Aluminium High Transmission** White/Black/Custom

IP rating

REFLECTOR

PMMA N/A Powder Coated 30

THERMAL MANAGEMENT

PRODUCT REFRENCE

HEAT SINK MATERIAL Aluminium **COOLING TECHNIQUE** Passive

OPTICAL SYSTEM

110° **BEAM ANGLE ILLUMINATION MODE** Direct Lighting SWIVEL No

Technical parameters are subjected to change time to time in order to improve product performance and reliability BP-RV00 AR/FRT/TEC/TDS/01

ARGON UP DOWN 15

Indoor

Suspended

LIGHT TECHNOLOGY

ELECTRICAL SYSTEM


LED FITTED DELIVERED LUMENS CCT (K) Tunable LED BINNING CRI (Ra)	1725 / 1650 / 1575 INPUT POWER 6000 / 4000 / 3000 POWER FACTOR On Request THD 3 Step MacAdam CONTROL GEAF	INPUT VOLTAGE INPUT POWER POWER FACTOR	<22 220 TO 240 Vac 15W (6U+9D) >0.95 <10% IN BUILT
LED LIFE L70 LUMINAIRE LUMINOUS FLUX only fore internal use LUMINOUS EFFICACY	45,000 HRS 2100 / 2025 / 1950 140 115 Lumens / Watt	DRIVER PROTECTION DIMMING EMERGENCY BATTERY BACKUP	OVP,Short Circuit,Surge Phase / Analog / Dali / RF / APP On Request

PACKAGING DETAILS


PACKING QTY

GROSS WEIGHT -

CARTOON SIZE -(LXBXH)

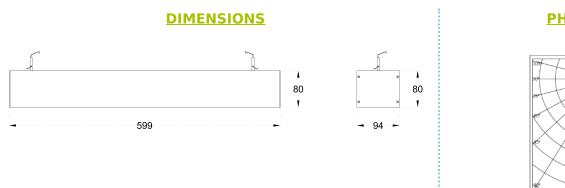

PHOTOMETRIC



ARCADE LIGHTING INDUSTRIES PVT LTD

8 Raju industrial estate, Penkar pada, Near dahisar check naka, Mira road 401107

NOTE : The technical data sheet with design registration stamp is the property of Arcade Lighting India Pvt. Ltd. & protected under Intellectual Property law, and it is restricted for sharing with other lighting suppliers