

ASPIRE TRIANGLE

Product Images

APPLICATION AREAS:







TECHNICAL SPECIFICATIONS

CONSTRUCTION AND MATERIALS

PRODUCT REFRENCE

ITEM CODE ENVIRONMENT INSTALLATION ASPIRE TRIANGLE 90 Indoor Suspended SIZE OUT SIDE MM CUT OUT SIZE (MM) HOUSING LENS / DIFFUSER

REFLECTOR SURFACE FINISH

IP rating

1010 (each leg) x52x74 -Extruded Aluminium High Transmission PMMA N/A White/Black/Custom Powder Coated 30

THERMAL MANAGEMENT

HEAT SINK MATERIAL Aluminium COOLING TECHNIQUE Passive

OPTICAL SYSTEM

BEAM ANGLE110°ILLUMINATION MODEDirect LightingSWIVELNo

LIGHT TECHNOLOGY

ELECTRICAL SYSTEM


		(UGR)	<22
LED FITTED	Bridgelux	INPUT VOLTAGE	220 TO 240 Vac
DELIVERED LUMENS	10350 / 9900 / 9450	INPUT POWER	90W
ССТ (К)	6000 / 4000 / 3000	POWER FACTOR	>0.95
Tunable	On Request	THD	<10%
LED BINNING	3 Step MacAdam	CONTROL GEAR	IN BUILT
CRI (Ra)	80 / 90	MOUNTING	-
LED LIFE L70	45,000 HRS	DRIVER PROTECTION	OVP,Short Circuit,Surge
LUMINAIRE	12600 / 12150 / 11700	DIMMING	Phase / Analog / Dali /
LUMINOUS FLUX			RF / APP
only fore internal use	140	EMERGENCY BATTERY	On Request
LUMINOUS EFFICACY	115 Lumens / Watt	BACKUP	

PACKAGING DETAILS


PACKING QTY -

GROSS WEIGHT -

CARTOON SIZE - (LXBXH)

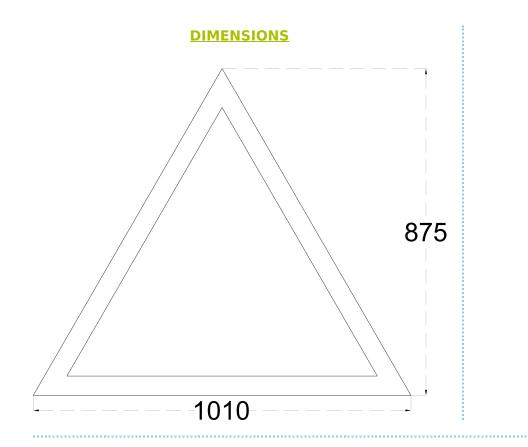

PHOTOMETRIC



ARCADE LIGHTING INDUSTRIES PVT LTD

8 Raju industrial estate, Penkar pada, Near dahisar check naka, Mira road 401107

NOTE : The technical data sheet with design registration stamp is the property of Arcade Lighting India Pvt. Ltd. & protected under Intellectual Property law, and it is restricted for sharing with other lighting suppliers

Technical parameters are subjected to change time to time in order to improve product performance and reliability BP-RV00 AR/FRT/TEC/TDS/01