

BAMBOO SLIM

Product Images

APPLICATION AREAS:

Office buildings,Retail,Supermarkets,Hospitality,liberar





TECHNICAL SPECIFICATIONS

PRODUCT REFRENCE

ITEM CODE ENVIRONMENT INSTALLATION

BAMBOO SLIM 60 Indoor Suspended

CONSTRUCTION AND MATERIALS

SIZE OUT SIDE MM CUT OUT SIZE (MM) HOUSING LENS / DIFFUSER

REFLECTOR

IP rating

SURFACE FINISH

64dia x 2400 -Extruded Aluminium High Transmission PMMA N/A -30

THERMAL MANAGEMENT

HEAT SINK MATERIAL Aluminium COOLING TECHNIQUE Passive

OPTICAL SYSTEM

BEAM ANGLE280°ILLUMINATION MODEDirect LightingSWIVELNo

LIGHT TECHNOLOGY

ELECTRICAL SYSTEM


LED FITTED	Bridgelux	(UGR) INPUT VOLTAGE	<22 220 TO 240 Vac
DELIVERED LUMENS	6000 / 5700 / 5400	INPUT POWER	60W
CCT (K)	6000 / 4000 / 3000	POWER FACTOR	>0.95
Tunable	On Request	THD	<10%
LED BINNING	3 Step MacAdam	CONTROL GEAR	Remote
CRI (Ra)	80 / 90	MOUNTING	
LED LIFE L70	45,000 HRS	DRIVER PROTECTION	OVP,Short Circuit,Surge
LUMINAIRE	8400 / 8100 / 7800	DIMMING	Phase / Analog / Dali /
LUMINOUS FLUX			RF / APP
only fore internal use	140	EMERGENCY BATTERY	On Request
LUMINOUS EFFICACY	100 Lumens / Watt	ВАСКИР	
	•		

PACKAGING DETAILS


PACKING QTY

GROSS WEIGHT -

CARTOON SIZE - (LXBXH)

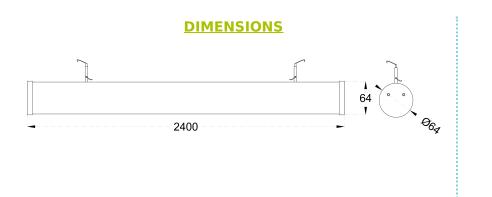

PHOTOMETRIC



ARCADE LIGHTING INDUSTRIES PVT LTD

8 Raju industrial estate, Penkar pada, Near dahisar check naka, Mira road 401107

NOTE : The technical data sheet with design registration stamp is the property of Arcade Lighting India Pvt. Ltd. & protected under Intellectual Property law, and it is restricted for sharing with other lighting suppliers