

## BULLET TRACK

Product Images

### APPLICATION AREAS:

Home, Office buildings, Retail, Sports facilities, Studio, Stage, Supermarkets, library



## TECHNICAL SPECIFICATIONS

### PRODUCT REFERENCE

ITEM CODE	BULLET TRACK 25
ENVIRONMENT	Indoor
INSTALLATION	Recessed

### CONSTRUCTION AND MATERIALS

SIZE OUT SIDE MM	75x100
CUT OUT SIZE (MM)	-
HOUSING	Die Cast Aluminium
LENS / DIFFUSER	High Transmission PS
REFLECTOR	PC High Purity
	Metallised
SURFACE FINISH	White/Black/Custom
	Powder Coated
IP rating	40

### THERMAL MANAGEMENT

HEAT SINK MATERIAL	Aluminium
COOLING TECHNIQUE	Passive

### OPTICAL SYSTEM

BEAM ANGLE	24°, 36°, 60°
ILLUMINATION MODE	Direct Lighting
SWIVEL	Yes

**LIGHT TECHNOLOGY**

LED FITTED	Bridgelux
DELIVERED LUMENS	2875 / 2750 / 2625
CCT (K)	6000 / 4000 / 3000
Tunable	On Request
LED BINNING	3 Step MacAdam
CRI (Ra)	80 / 90
LED LIFE L70	40,000 HRS
LUMINAIRE	4000 / 3875 / 3750
LUMINOUS FLUX	
only fore internal use	160
LUMINOUS EFFICACY	115 Lumens / Watt


**ELECTRICAL SYSTEM**

(UGR)	NA
INPUT VOLTAGE	220 TO 240 Vac
INPUT POWER	25W
POWER FACTOR	>0.95
THD	<10%
CONTROL GEAR	Remote
MOUNTING	
DRIVER PROTECTION	OVP,Short Circuit,Surge
DIMMING	Phase / Analog / Dali / RF / APP
EMERGENCY	On Request
BATTERY BACKUP	


**PACKAGING DETAILS**

PACKING QTY -	GROSS WEIGHT -	CARTOON SIZE - (LXBXH)
---------------	----------------	---------------------------

**DIMENSIONS**

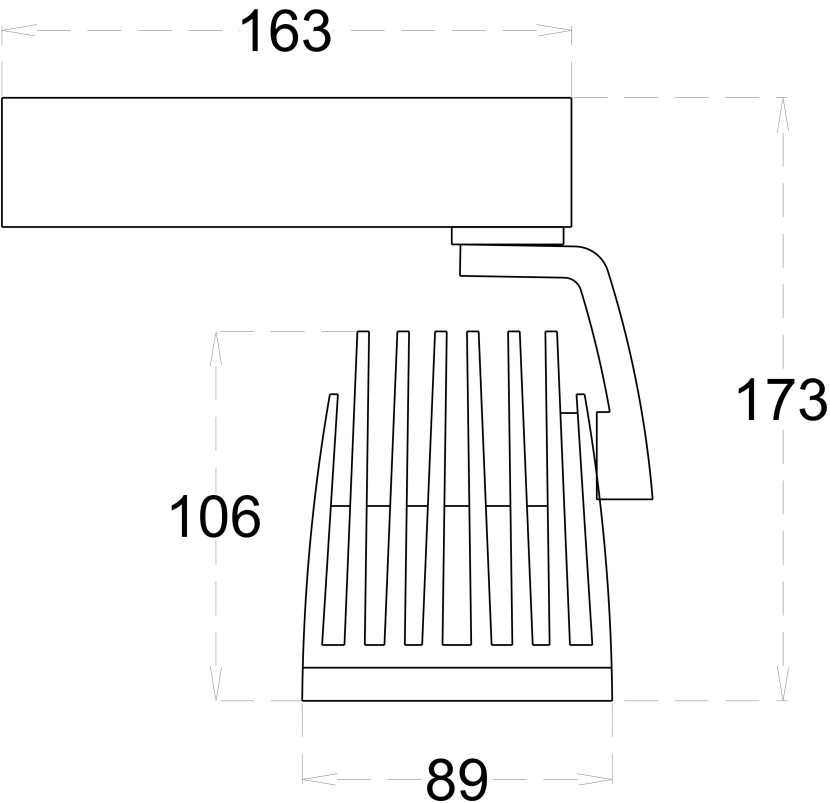

**PHOTOMETRIC**



.....

## ARCADE LIGHTING INDUSTRIES PVT LTD

8 Raju industrial estate, Penkar pada, Near  
dahisar check naka, Mira road 401107

**NOTE :** The technical data sheet with design registration stamp is the property of Arcade Lighting India Pvt. Ltd. & protected under Intellectual Property law, and it is restricted for sharing with other lighting suppliers

---

Technical parameters are subjected to change time to time in order to improve product performance and reliability

BP-RV00 AR/FRT/TEC/TDS/01

