

DUSK

Product Images

APPLICATION AREAS:

Home, Office buildings, Retail, Sports facilities, Studio, Stage, Supermarkets, liberary













TECHNICAL SPECIFICATIONS

PRODUCT REFRENCE

ITEM CODE DUSK 18 ENVIRONMENT Indoor INSTALLATION Recessed

CONSTRUCTION AND MATERIALS

SIZE OUT SIDE MM 85 MM DIA **CUT OUT SIZE (MM)** 75X100

HOUSING Die Cast Aluminium **LENS / DIFFUSER** High Transmission PC

REFLECTOR PC High Purity Metallised

SURFACE FINISH White/Black/Custom

Powder Coated

IP rating 40

THERMAL MANAGEMENT

HEAT SINK MATERIAL Aluminium **COOLING TECHNIQUE** Passive

OPTICAL SYSTEM

BEAM ANGLE 24°,36°

ILLUMINATION MODE Direct Lighting

SWIVEL NO

LIGHT TECHNOLOGY

LED FITTED Bridgelux

DELIVERED LUMENS 2070 / 1980 / 1890 **CCT (K)** 6000 / 4000 / 3000

Tunable On Request **LED BINNING** 3 Step MacAdam

CRI (Ra) 80 / 90 **LED LIFE L70** 40,000 HRS

LUMINAIRE 2880 / 2790 / 2700

LUMINOUS FLUX

only fore internal use 160

LUMINOUS EFFICACY 115 Lumens / Watt

ELECTRICAL SYSTEM

(UGR) <19

INPUT VOLTAGE 220 TO 240 Vac

INPUT POWER 18W
POWER FACTOR >0.95
THD <10%
CONTROL GEAR Remote

MOUNTING

DRIVER PROTECTION OVP,Short Circuit,Surge

DIMMING Phase

Phase / Analog / Dali /

RF / APP


On Request

EMERGENCY


BATTERY BACKUP

PACKAGING DETAILS

PACKING QTY - GROSS WEIGHT- CARTOON SIZE - (LXBXH)

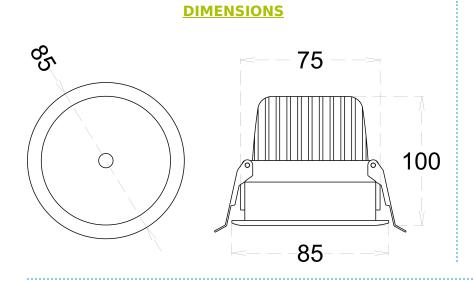

PHOTOMETRIC



ARCADE LIGHTING INDUSTRIES PVT LTD

8 Raju industrial estate, Penkar pada, Near dahisar check naka, Mira road 401107

P-RV00 AR/FRT/TEC/TDS/01	