HIGHBAY (SMD)

Product Images

APPLICATION AREAS:

Sports facilities,Studio,
Stage,Supermarkets,Industrial buildings



Hi Power | IP 65 | THD <10% | PF >0.95 | Driver Protection OVP, Surge, Short Circuit

TECHNICAL SPECIFICATIONS

PRODUCT REFRENCE

ITEM CODE	HIGHBAY (SMD) 150
ENVIRONMENT	OUTDOOR WALL MOUNTED
INSTALLATION	MOUNTED

CONSTRUCTION AND MATERIALS

SIZE OUT SIDE MM	-
CUT OUT SIZE (MM)	-
HOUSING	HOUSING
LENS / DIFFUSER	Tempered Glass
REFLECTOR	N/A
SURFACE FINISH	GREY POWDER COATED
IP rating	65

THERMAL MANAGEMENT

HEAT SINK MATERIAL	Aluminium
COOLING TECHNIQUE	Passive

OPTICAL SYSTEM

BEAM ANGLE	110°
ILLUMINATION MODE	Indirect Lighting
SWIVEL	No

LIGHT TECHNOLOGY

LED FITTED	Bridgelux
DELIVERED LUMENS	19500 / 18750 / 18000
CCT (K)	6000 / 4000 / 3000
Tunable	On Request
LED BINNING	3 Step MacAdam
CRI (Ra)	80 / 90
LED LIFE L70	45,000 HRS
LUMINAIRE	21000 / 20250 / 19500
LUMINOUS FLUX	
LUMINOUS EFFICACY	130 Lumens / Watt

ELECTRICAL SYSTEM

(UGR)	<18
INPUT VOLTAGE	220 TO 240 Vac
INPUT POWER	150W
POWER FACTOR	>0.95
THD	<10%
CONTROL GEAR	IN BUILT
MOUNTING	
DRIVER PROTECTION	OVP,Short Circuit,Surge
DIMMING	OPTION/AL
EMERGENCY	On Request
BATTERY BACKUP	


PACKAGING DETAILS

PACKING QTY -


GROSS WEIGHT -

CARTOON SIZE (LXBXH) -

DIMENSIONS

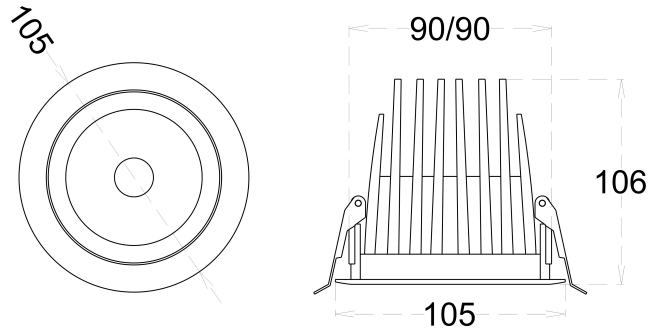

PHOTOMETRIC



ARCADE LIGHTING

8 Raju industrial estate, Penkar pada, Near dahisar check naka, Mira road 401107

NOTE : The technical data sheet with design registration stamp is the property of Arcade Lighting & protected under Intellectual Property law, and it is restricted for sharing with other lighting suppliers