

INTERIO SLIM

Product Images

APPLICATION AREAS:

Office buildings,Retail,Supermarkets,Hospitality,liberar





TECHNICAL SPECIFICATIONS

PRODUCT REFRENCE

ITEM CODEINTERIO SLIM 60ENVIRONMENTIndoorINSTALLATIONSuspended

CONSTRUCTION AND MATERIALS

SIZE OUT SIDE MM CUT OUT SIZE (MM) HOUSING LENS / DIFFUSER

REFLECTOR

SURFACE FINISH

IP rating

2367x36x36 -Extruded Aluminium High Transmission PMMA N/A White/Black/Custom Powder Coated 30

THERMAL MANAGEMENT

HEAT SINK MATERIAL Aluminium COOLING TECHNIQUE Passive

OPTICAL SYSTEM

BEAM ANGLE110°ILLUMINATION MODEDirect LightingSWIVELNo

LIGHT TECHNOLOGY

ELECTRICAL SYSTEM


		(UGR)	<22
LED FITTED	Bridgelux	INPUT VOLTAGE	220 TO 240 Vac
DELIVERED LUMENS	6900 / 6600 / 6300	INPUT POWER	60W
ССТ (К)	6000 / 4000 / 3000	POWER FACTOR	>0.95
Tunable	On Request	THD	<10%
LED BINNING	3 Step MacAdam	CONTROL GEAR	Remote
CRI (Ra)	80 / 90	MOUNTING	
LED LIFE L70	45,000 HRS	DRIVER PROTECTION	OVP,Short Circuit,Surge
LUMINAIRE	8400 / 8100 / 7800	DIMMING	Phase / Analog / Dali /
LUMINOUS FLUX		Diminic	RF / APP
only fore internal use	140	EMERGENCY BATTERY	On Request
LUMINOUS EFFICACY	115 Lumens / Watt	BACKUP	on nequest
	1		

PACKAGING DETAILS


PACKING QTY 2

GROSS WEIGHT -

CARTOON SIZE 96"x 5.2"x 4.2" (LXBXH)

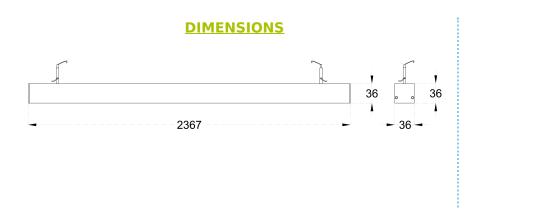

PHOTOMETRIC



ARCADE LIGHTING INDUSTRIES PVT LTD

8 Raju industrial estate, Penkar pada, Near dahisar check naka, Mira road 401107

NOTE : The technical data sheet with design registration stamp is the property of Arcade Lighting India Pvt. Ltd. & protected under Intellectual Property law, and it is restricted for sharing with other lighting suppliers