
JET PROOF

Product Images

APPLICATION AREAS:

Sports facilities,Studio,
Stage,Supermarkets,Industrial buildings



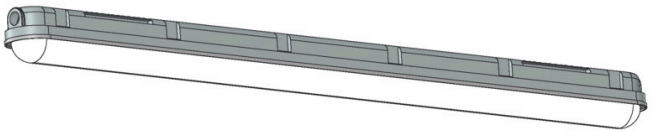

TECHNICAL SPECIFICATIONS

PRODUCT REFRENCE

ITEM CODE	Jet Proof LED 36
ENVIRONMENT	OUTDOOR SURFACE / SUSPENDED
INSTALLATION	Suspended

CONSTRUCTION AND MATERIALS

SIZE OUT SIDE MM	1200x80x78
CUT OUT SIZE (MM)	-
HOUSING	HOUSING
LENS / DIFFUSER	Polycarbonate
REFLECTOR	N/A
SURFACE FINISH	N/A
IP rating	66

THERMAL MANAGEMENT

HEAT SINK MATERIAL	Aluminium
COOLING TECHNIQUE	Passive

OPTICAL SYSTEM

BEAM ANGLE	110°
ILLUMINATION MODE	Indirect Lighting
SWIVEL	No

LIGHT TECHNOLOGY

LED FITTED	Bridgelux
DELIVERED LUMENS	3900 / 3750 / 3600
CCT (K)	6000 / 4000 / 3000
Tunable	On Request
LED BINNING	3 Step MacAdam
CRI (Ra)	80 / 90
LED LIFE L70	45,000 HRS
LUMINAIRE	4200 / 4050 / 3900
LUMINOUS FLUX	
LUMINOUS EFFICACY	130 Lumens / Watt

ELECTRICAL SYSTEM

(UGR)	<17
INPUT VOLTAGE	220 TO 240 Vac
INPUT POWER	30W
POWER FACTOR	>0.95
THD	<10%
CONTROL GEAR	IN BUILT
MOUNTING	
DRIVER PROTECTION	OVP,Short Circuit,Surge
DIMMING	OPTION/AL
EMERGENCY	On Request
BATTERY BACKUP	


PACKAGING DETAILS

PACKING QTY -


GROSS WEIGHT -

CARTOON SIZE (LXBXH) -

DIMENSIONS

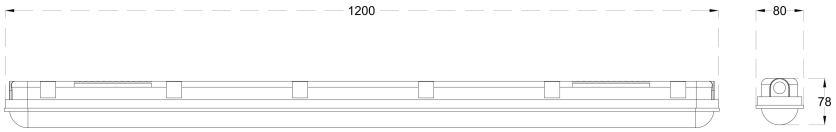

PHOTOMETRIC



ARCADE LIGHTING

8 Raju industrial estate, Penkar pada, Near dahisar check naka, Mira road 401107

NOTE : The technical data sheet with design registration stamp is the property of Arcade Lighting & protected under Intellectual Property law, and it is restricted for sharing with other lighting suppliers