


## LASER LINE

Product Images

### APPLICATION AREAS:

Office  
buildings, Retail, Supermarkets, Hospitality, liberal

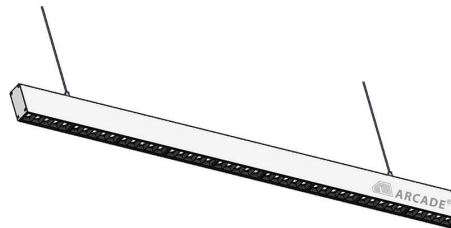

Glare-Free



Linkable



Driver  
Inbuilt



Dimming  
Optional



Tailor Made

## TECHNICAL SPECIFICATIONS

### PRODUCT REFERENCE

ITEM CODE	LASER LINE 15
ENVIRONMENT	Indoor
INSTALLATION	Suspended

### CONSTRUCTION AND MATERIALS

SIZE OUT SIDE MM	536x35x78
CUT OUT SIZE (MM)	-
HOUSING	Extruded Aluminium
LENS / DIFFUSER	PMMA
REFLECTOR	PC High Purity Metallised
SURFACE FINISH	White/Black/Custom Powder Coated
IP rating	30

### THERMAL MANAGEMENT

HEAT SINK MATERIAL	Aluminium
COOLING TECHNIQUE	Passive

### OPTICAL SYSTEM

BEAM ANGLE	24°, 40°
ILLUMINATION MODE	Direct Lighting
SWIVEL	No

## LIGHT TECHNOLOGY

<b>LED FITTED</b>	Bridgelux, Osram, Cree
<b>DELIVERED LUMENS</b>	1500 / 1440 / 1380
<b>CCT (K)</b>	6000 / 4000 / 3000
<b>Tunable</b>	On Request
<b>LED BINNING</b>	3 Step MacAdam
<b>CRI (Ra)</b>	80 / 90
<b>LED LIFE L70</b>	45,000 HRS
<b>LUMINAIRE</b>	1680 / 1620 / 1560
<b>LUMINOUS FLUX</b>	
<b>only fore internal use</b>	140
<b>LUMINOUS EFFICACY</b>	125 Lumens / Watt

## ELECTRICAL SYSTEM

<b>(UGR)</b>	<16
<b>INPUT VOLTAGE</b>	220 TO 240 Vac
<b>INPUT POWER</b>	12W
<b>POWER FACTOR</b>	>0.95
<b>THD</b>	<10%
<b>CONTROL GEAR</b>	IN BUILT
<b>MOUNTING</b>	
<b>DRIVER PROTECTION</b>	OVP, Short Circuit, Surge
<b>DIMMING</b>	Phase / Analog / Dali / RF / APP
<b>EMERGENCY BATTERY BACKUP</b>	On Request

## PACKAGING DETAILS

**PACKING QTY** 4


**GROSS WEIGHT -**

**CARTON SIZE** 48.75"x8.5"x4"  
(LXBXH)

## DIMENSIONS



## PHOTOMETRIC



## **ARCADE LIGHTING INDUSTRIES PVT LTD**

8 Raju industrial estate, Penkar pada, Near  
dahisar check naka, Mira road 401107

**NOTE :** The technical data sheet with design registration stamp is the property of Arcade Lighting India Pvt. Ltd. & protected under Intellectual Property law, and it is restricted for sharing with other lighting suppliers

Technical parameters are subjected to change time to time in order to improve product performance and reliability

BP-RV00 AR/FRT/TEC/TDS/01