

VEGA PLUS SQ

Product Images

APPLICATION AREAS:

Home,Office buildings,Retail,Sports facilities,Studio, Stage,Supermarkets,liberary













TECHNICAL SPECIFICATIONS

PRODUCT REFRENCE

ITEM CODE VEGA PLUS SQ 12

ENVIRONMENT Indoor **INSTALLATION** Recessed

CONSTRUCTION AND MATERIALS

SIZE OUT SIDE MM 170×90 **CUT OUT SIZE (MM)** 155×75×100

HOUSINGDie Cast AluminiumLENS / DIFFUSERTempered GlassREFLECTORPC High Purity

Metallised

SURFACE FINISH White/Black/Custom

Powder Coated

IP rating 40

THERMAL MANAGEMENT

HEAT SINK MATERIAL Aluminium COOLING TECHNIQUE Passive

OPTICAL SYSTEM

BEAM ANGLE 15°,24°,36°,60°
ILLUMINATION MODE Direct Lighting
SWIVEL Yes

LIGHT TECHNOLOGY

LED FITTED Bridgelux

DELIVERED LUMENS 1380 / 1320 / 1260 **CCT (K)** 6000 / 4000 / 3000

Tunable On Request **LED BINNING** 3 Step MacAdam

CRI (Ra) 80 / 90 **LED LIFE L70** 40,000 HRS

LUMINAIRE 1920 / 1860 / 1800

LUMINOUS FLUX

only fore internal use 160

LUMINOUS EFFICACY 115 Lumens / Watt

ELECTRICAL SYSTEM

(UGR) <19

INPUT VOLTAGE 220 TO 240 Vac INPUT POWER 12W (2x6W)

POWER FACTOR >0.95
THD <10%
CONTROL GEAR Remote

MOUNTING

DRIVER PROTECTION OVP,Short Circuit,Surge

DIMMING

Phase / Analog / Dali /

RF / APP

EMERGENCY On Request


BATTERY BACKUP

PACKAGING DETAILS


PACKING QTY 15 GROSS WEIGHT- CARTOON SIZE 28"x 19.75"x

(LXBXH) 12.5"

DIMENSIONS

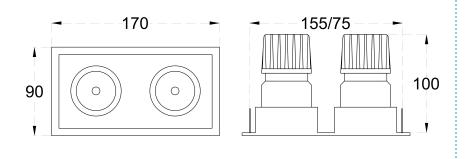

PHOTOMETRIC



ARCADE LIGHTING INDUSTRIES PVT LTD

8 Raju industrial estate, Penkar pada, Near dahisar check naka, Mira road 401107

P-RV00 AR/FRT/TEC/TDS/01	